



Parker


Super Roadmix / 30/60/90

Mobile Asphalt Plants


**Quality
Engineered
Excellence
Since
1911**



Super-Roadmix Series

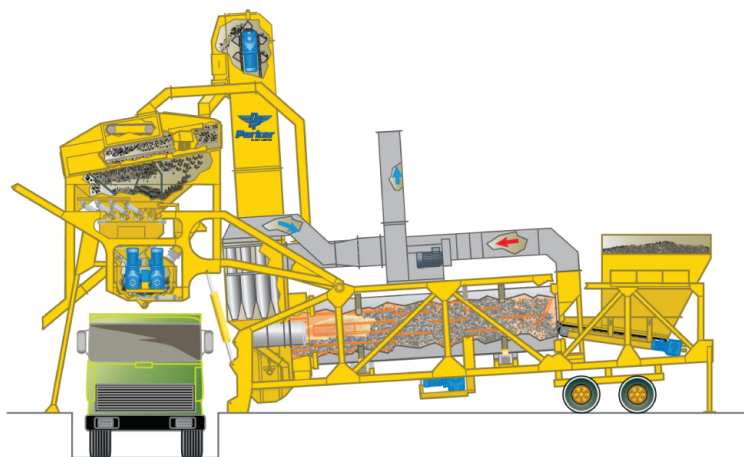


Option 1: Super-Roadmix with combined 2 bin compartment feed unit

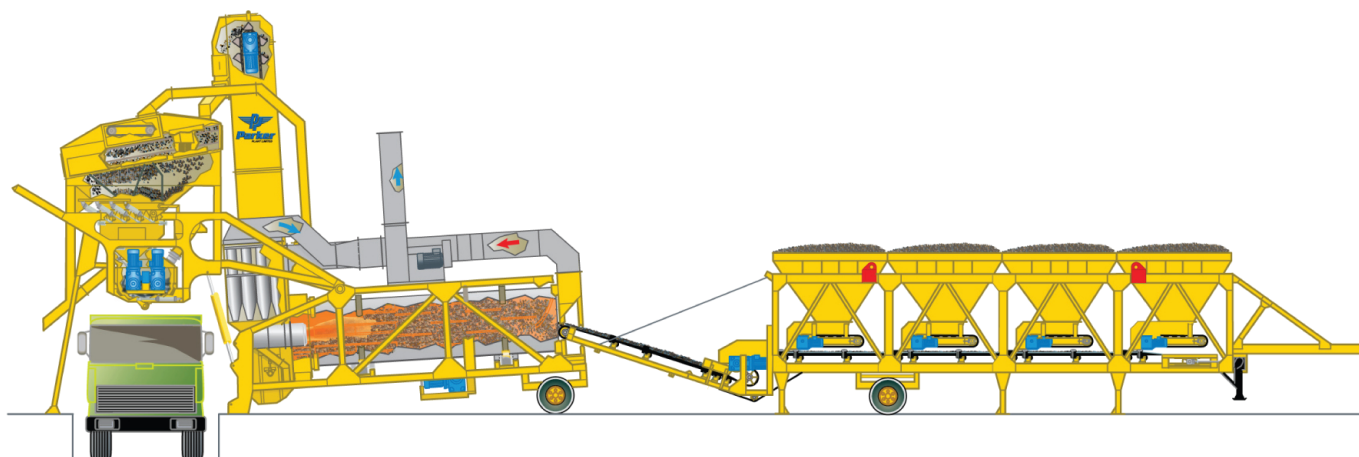


Option 2:* Super-Roadmix complete with separate three or four bin mobile feed unit

Plant Options


(available in both mobile and fixed configurations)

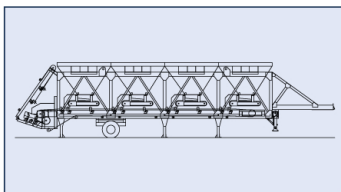


Option 1: Feed Unit

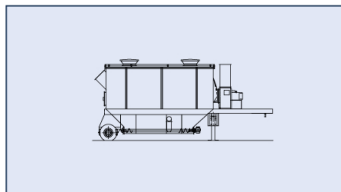

Option 2: Secondary Dust Filter

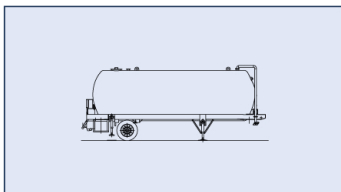

Option 3: Bitumen Tanks

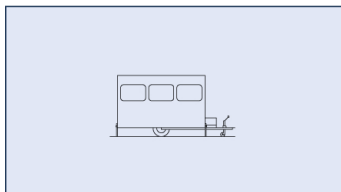

Option 4: Control Cabin

DRYER CAPACITIES (tph @ 150°C discharge temperature)			
MOISTURE CONTENT	3%	4%	5%
SRM30	30	30	25
SRM60	60	60	50
SRM90	90	90	75

TRAVELLING DIMENSIONS / MIXING SECTION			
	SRM30	SRM60	SRM90
DRYER / MIXING SECTION			
Width (mm)	2600	2900	3200
Length (mm)	11200/13200*	12650/15700*	15000/18000*
Height (mm)	4150	4800	4850
Weight (mm)	15t/18t	19t/22t	23t/26t
FEED UNIT			
Width (mm)	2100	2300	2500
Length (mm)	12850	14850	16850
Height (mm)	3200	3500	3900
Weight (tonne)	9.0	11.0	13.0

Parker Plant Limited, Viaduct Works, Canon Street, Leicester, LE4 6GH, United Kingdom

T: 0090 312 386 09 20 - F: 0090 312 386 09 22 - W: www.parkerturkiye.com - E: info@parkerturkiye.com

Due to our policy of continual product development, changes to specification and data may occur without prior notice.
Illustrations and photos may show optional equipment.